

**Module Address**

IP Address 192.168.0.1  
Subnet Mask: 255.255.255.0  
Default gateway 192.168.0.2

Creator: LesMach

Checked:

Date: 9/9/19 2:32 PM/11/12/19 7:33 PM

Project:

Installation:


File:

Customer:

Diagram No.:

Page:

**Wyjście Start do DI5  
Falownika - START**

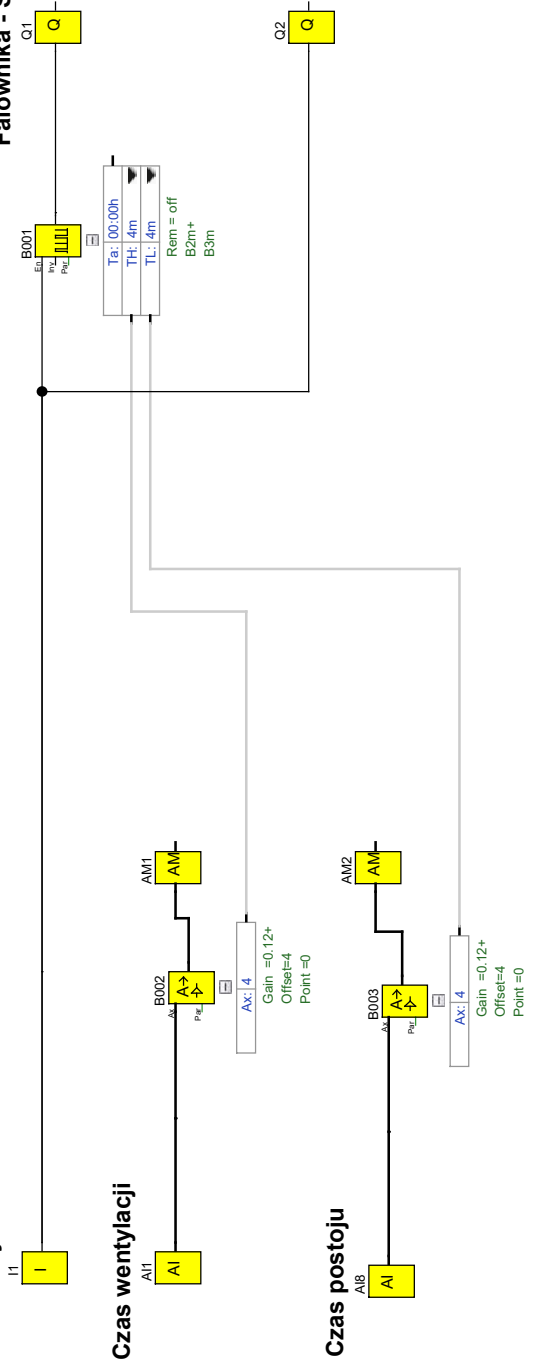

Creator:	LesMach	Project:		Customer:	
Checked:		Installation:		Diagram No.:	
Date:	9/9/19 2:32 PM/11/12/19 7:33 PM	File:	Wiromag120s.lsc	Page:	2 / 4

Block Number (Type)	Parameter
A11(Analog input) : Czas wentylacji	
A18(Analog input) : Czas postoju	
B001(Asynchronous Pulse Generator) :	Rem = off B2m+ B3m
B002(Analog Amplifier) :	Gain =0.12+ Offset=4 Point =0
B003(Analog Amplifier) :	Gain =0.12+ Offset=4 Point =0
I1(Input) : Start wentylatora	
Q1(Output) : Wyjście Start do DI5 Falownika - START	

Creator:	LesMach		Project:		Customer:	
Checked:			Installation:		Diagram No.:	
Date:	9/9/19 2:32 PM/11/12/19 7:33 PM		File:	Wiromag120s.Isc	Page:	3 / 4

Connection	Label
A11	
A18	
I1	
AM1	
AM2	
Q1	
Q2	