

Chapter 2



OVERVIEW OF THE 506/507/508

Contents
Page

- *User Supplied Primary Components 2-2*
- *Optional Ancillary Components..... 2-2*

OVERVIEW OF THE 506/507/508

Figure 2.1 Recognition Drawing

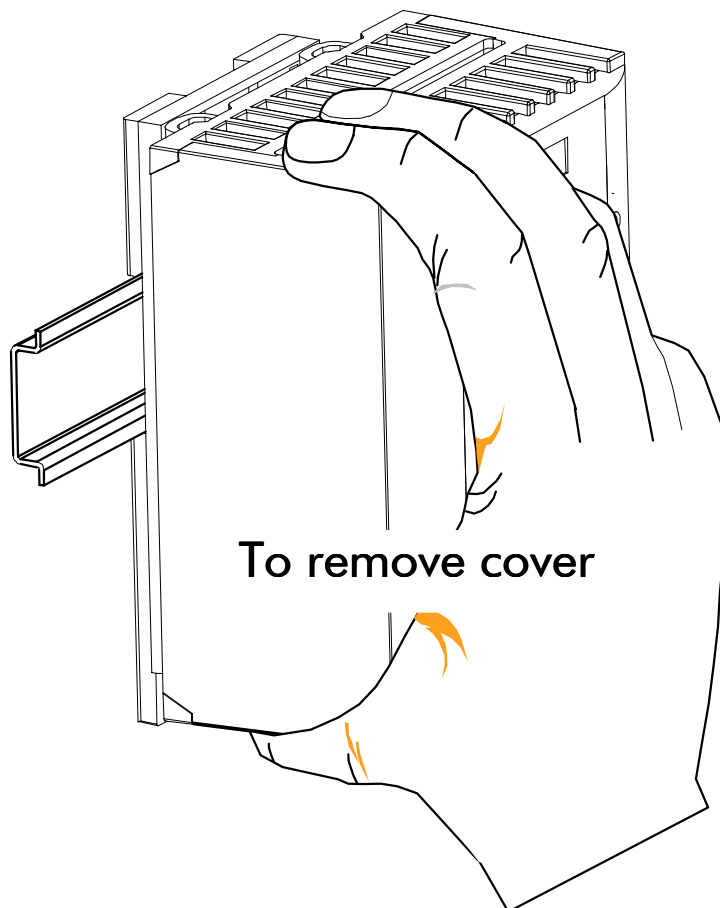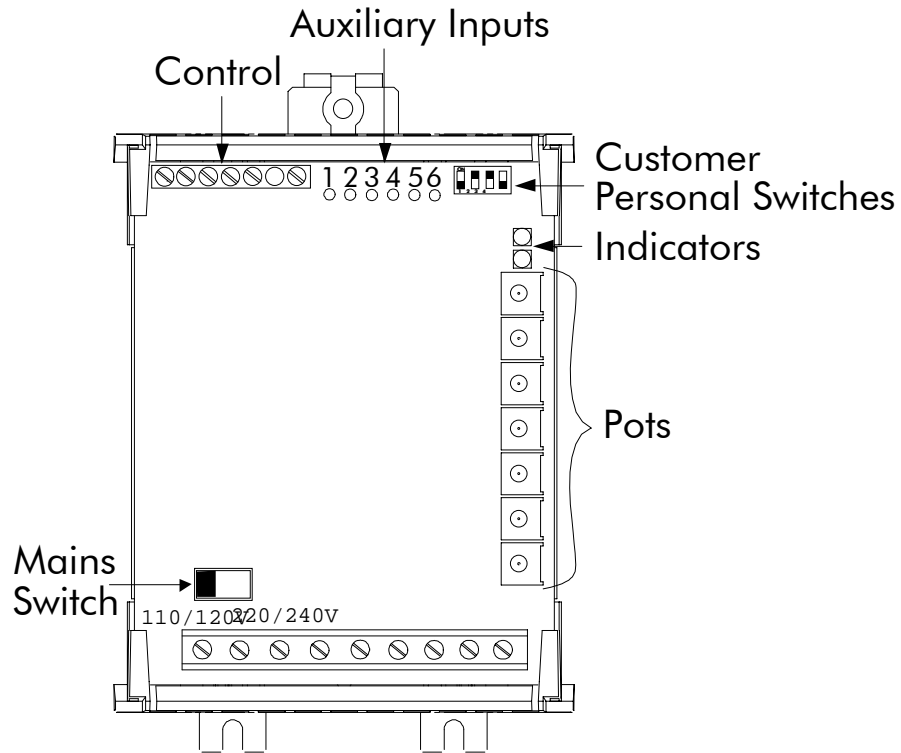

2-2 Overview of the 506/507/508

User Supplied Safety Components

Speed /

Torque Potentiometer 10K Isolated spindle and insulating knob

Switch

Rated for input supply voltage.

Note: *Safety Components provide Isolation for the User. These components should be selected to provide a double insulated (or reinforced) isolation boards for the user suitable for the input supply voltage used. The product is designed for use in a pollution degree 2 environment, overvoltage category III, enclosure mounted. (Refer to EN61010, IEC664 or EN50178 for more information regarding the correct selection of these components).*

Optional Ancillary Components

EMC Filter 18A ac(12A dc) CO389115